

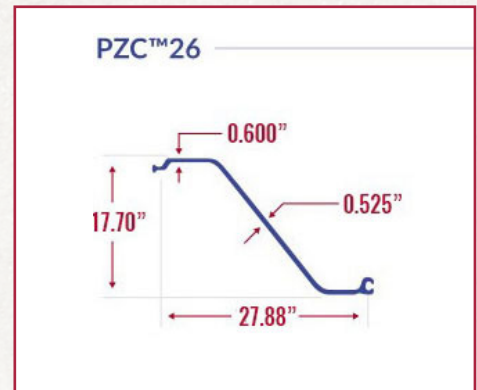


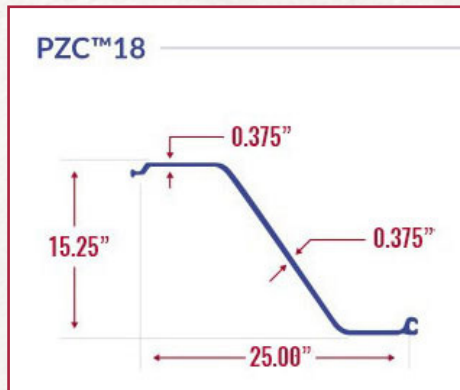

**HAMMER & STEEL INC.**  
 PILING, PILE DRIVING EQUIPMENT, DRILLING EQUIPMENT, PARTS & SERVICE

# Steel Sheet Piling

## New High Efficiency “Z” Sections

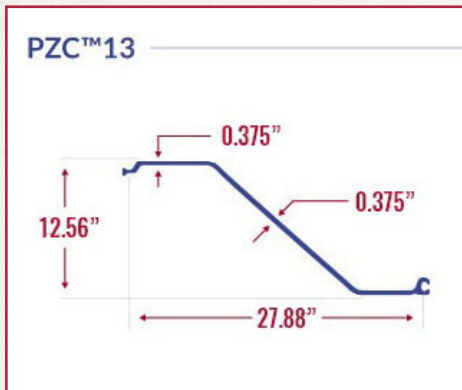

### Dimensions & Properties

Section	Nominal Width in.	Weight in Pounds		Moment of Inertia in. <sup>4</sup>		Section Modulus in. <sup>3</sup>		Surface Area sq. ft. per lin. ft	
		Per lin. ft. of Bar	Per sq. ft. of Wall	Single Section	Per lin. ft. of Wall	Single Section	Per lin. ft. of Wall	Total Area	Nominal Coating Area
PZC 13	27.88	50.4	21.7	353.0	152.0	56.2	24.2	6.09	5.60
PZC 18	25.00	50.4	24.2	532.2	255.5	69.8	33.5	6.09	5.60
PZC 26	27.88	73.9	31.8	994.3	428.1	112.4	48.4	6.65	6.15

\* All Dimensions Are Nominal

### “Z” Section Notes

- ▶ Standard, high-strength, low alloy ASTM A572 Grade 50 steel. ASTM A690 steel available upon inquiry.
- ▶ 100% domestic cast and hot-rolled in the United States by Gerdau.
- ▶ “Z” sections include industry-preferred ball and socket interlock.

SALES • RENTALS • SERVICE • PARTS

800-325-PILE (7453)

[www.hammersteel.com](http://www.hammersteel.com)

Missouri  
800.325.PILE (7453)

California  
877.224.3356

Florida  
904.284.6800

Kansas  
913.768.1505

Minnesota  
952.469.6060

New Jersey  
973.512.2940

Texas  
936.257.8790

Québec  
1.418.872.5515